

# Face Recognition Techniques - An evaluation Study

Dr. Asmahan M Altaher

Department of Management Information System, Applied Science University, 166-11391, Jordan

Email: a\_altaher68@hotmail.com

## ABSTRACT

Face recognition is the ability of categorize a set of images based on certain discriminatory features. Classification of the recognition patterns can be difficult problem and it is still very active field of research. The paper introduces conceptual framework for descriptive study on techniques of face recognition systems. It aims to describe the previous researches have been study the face recognition system, in order scope on the algorithms, usages, benefits, challenges and problems in this felids, the paper proposed the face recognition as sensitive learning task experiments on a large face databases demonstrate of the new feature. The researcher recommends that there's a needs to evaluate the previous studies and researches, especially on face recognition field and 3D, hopeful for advanced techniques and methods in the near future.

Keywords - Face recognition Techniques, recognition algorithm, automated Facial System, evolutionary Pursuit, and Kernel Methods.

Date of Submission: October 30, 2014

Date of Acceptance: December 29, 2014

## I. INTRODUCTION

The Humans have recognition capabilities that are unparalleled in the modern computing era. Humans have always had the a ability to recognize and distinguish between faces features. Recently the computers have been shown the same ability. In the mid of 1960s, scientists began work on using the computer to recognize human faces, since that time the facial recognition software has come a long way, the governments and private companies start to used the face recognition system. A lot of changes are being made to enhance scientists capabilities in this field (Zhang al et., 2009). Many researchers belief that face recognition need to be about face detection, the prior step to face recognition, the accurate detection of human faces in arbitrary scenes, is the most important process involved. Human faces are remarkably similar in global properties, including size, aspect ratio, and location of main features, but can vary considerably in details across individuals, gender, race, or due to facial expression, most traditional face recognition systems attempt to achieve a low recognition error rate, implicitly assuming that the losses of all misclassifications are the same (Shlizerman, 2011). Facial recognition software in any given episode, the security department at the fictional. Montecito Hotel and Casino uses its video surveillance system to pull an image of a card counter, thief or blacklisted individual, then runs that image through the database to find a match and identify the person. In 2001, the Tampa Police Department installed police cameras equipped with facial recognition technology in their City nightlife district in an attempt to cut down on crime in the area, the system failed to do the job, and it was scrapped in 2003 due to ineffectiveness (Patra and Das. 2008).The remainder of this paper is organized as follows; the first Section was, introduced framework and discuss -phase of this

framework from reviewed the previous studies. In Second Section, were about methodology, finally, the researcher results and concludes.

### Research Framework

The paper descript the conceptual framework of face recognition systems through scope on the algorithms, usages, benefits, challenges and problems in this felids, Figure (1)

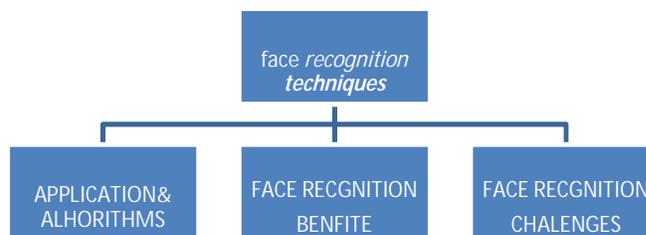


Figure (1) Face Recognition Framework

Resource: researcher adapted

### Literature review

D. Wilkes et. Al., (1992) start with a study related face recognition system exploited the mobility of the camera by used low-level image data to drive the camera to a standard viewpoint with respect to an unknown object, from such a viewpoint, the object recognition task is reduced to a two-dimensional pattern recognition problem, the system was used an efficient tree-based, probabilistic indexing scheme to find the model object that is likely to

have generated the observed data, and for line tracking uses a modification of the token-based tracking scheme of The system has been successfully tested on a set of origami objects. Given sufficiently accurate low-level data (CHEN AL ET. 2005) (Jianke, 2009). Recognition time is expected to grow only logarithmically with the number of objects stored. (Xiong, 2010).

Thus, Dyar. C.R (1994) argued that there are two basic behaviors that allow reconstruction of a patch around any point in a reconstruction surface region. These behaviors rely only on information extracted directly from face images, and are simple enough to be executed in real time. Global surface reconstruction can be provably achieved by integrating these behaviors to iteratively “grow” the reconstructed regions integrating these behaviors to iteratively “grow” the reconstructed regions (Dyar. C.R.,1994) (Piter, alet, 2008).

In the other hand Jianke Zhu,(2009) was present a fusion approach to solve the nonrigid shape recovery problem, which takes advantage of both the appearance information and the local features, they have two major contributions. First, they propose a novel progressive finite Newton optimization scheme for the feature-based nonrigid surface detection problem, which is reduced to only solving a set of linear equations. The key is to formulate the non rigid surface detection as an unconstrained quadratic optimization problem that has a closed-form solution for a given set of observations. Second, they proposed a deformable Lucas-Kanade algorithm that triangulates the template image into small patches and constrains, algorithm for both efficient and effective issues.

However, YUN FU (2010) introduced paper about Age estimation from facial images has promising applications in human-computer interaction, biometrics, visual surveillance, and electronic customer relationship management, etc. Most existing techniques and systems can only handle frontal or near frontal view age estimation due to the difficulties of (1) differentiating diverse variations from uncontrollable and personalized aging patterns on faces and (2) collecting a fairly large database covering the chronometrical image series for each individual in different views, the researcher proposed a robust framework to deal with multi view age estimation problem, also a large face database, with significant age, pose, gender, and identity variations, which should be followed by classification or regression algorithms (YIN., 2010).

Also Zheng, (2009) was written in the same topic and focused on the human action recognition problem and propose a new Curve-Distance approach based on the geometry modeling of video appearance manifold and the human action time series statistics on the geometry information, he present experimental results on the KTH database demonstrate the solution to be effective and promising (Zhang, 2009).

Finally Gao.,et al.,(2008) was proposed a novel high-order local pattern descriptor, local derivative pattern (LDP), for face recognition. LDP is a general framework to encode directional pattern features based on local derivative variations. The  $n$ th-order LDP is proposed to

encode the  $(n-1)$ th -order local derivative direction variations, which can capture more detailed information, they discover that the high-order LDP consistently performs much better than LBP for both face identification and face verification under various conditions. Next section will be on face recognition applications

### Applications of Face Recognition

Allot of application design are available to help in face recognition, her bellow some of the applications are:

- 1- Application number one is related to find a face within a large database of faces. In this approach the system returns a possible list of faces from the database. The most useful applications contain crowd surveillance, video content indexing, and personal identification: driver's license, mug shots matching are examples of this type of application (Wang. 2009) (Whaite et al., 1991).
- 2- Application number tow is about the real time face recognition: Here, face recognition is used to identify a person on the spot and grant access to a building or a compound, thus avoiding security hassles. In this case the face is compared will be against a multiple samples of a person (Bartoli, 2006) (Wright, 2009).

### Existing Algorithms

Face Recognition Based on Principal Component Analysis.

Principal Component Analysis (PCA) is known as algorithm that used in face recognition. The basic idea in PCA is to determine a vector of much lower dimension that best approximates in some sense a given data vector, thus, in face recognition, it takes an  $s$ -dimensional vector representation of each face in a training set of images as input, and determines a  $t$ -dimensional subspace whose basis vector is maximum corresponding to the original image, the dimension of this new subspace is lower than the original one ( $t \ll s$ ). If the original image elements are considered as random variables, then the principal components are along the eigenvectors corresponding to the larger eigen values of the correlation matrix, and error minimization is done in a least-squares sense(Qing Chen, Xiaoli Yang, Jiying Zhao, 2006).

### Face Recognition Based on Independent Component Analysis

Like the PCA based technique, this is also a technique to extract the statistics of the random variables. However, in this case, the second-order and higher-order dependencies of the input data are minimized by the technique and the basis along which the data is statically independent are found(Xu.,et al 2007)

### Evolutionary Pursuit

This is an eigenspace-based approach that searches for the best set of projection axes in order to maximize a fitness function, measuring at the same time the classification accuracy and generalization ability of the



#### **Benefit 4 - Easy Integration:**

Integrated Biometric facial systems are also easy to program into the companies computer system, usually they will work with existing software that they have in place (Wiskott, al et, 1995).

#### **Benefit 5 - High Success Rate:**

Facial biometrics technology today has a high success rate, especially with the emergence of 3d face recognition technologies, it is extremely difficult to fool the system, and so you can feel secure knowing that your biometrics computer security system will be successful at tracking time and attendance while providing better security (Jianke Zhu, 2009). Companies with a biometric security device today can purchase a variety of security devices, including safes, locks, time clocks, and more (Wilkes et al., 1992).

#### **Face recognition techniques challenging**

One of the most important challenging of face recognition is the fact that capturing technology requires cooperation from a subject, for example lens or laser based scanners require the subject to be at a certain distance from the sensor, furthermore, a laser scanner requires a few seconds of complete immobility. In addition, there are currently very few high-quality face databases available for testing and evaluation purposes, those databases that are available should compare to databases used for ( Yun et al., 2010).

Furthermore, the comparison of the different face recognition techniques is challenging for a number of reasons:

Firstly; there are a few standardized face databases which are used for benchmarking purposes, thus, the size and type of 3D face datasets varies significantly across different publications.

Secondly; there are differences in the experimental setup and in the metrics which are used to evaluate the performance of face recognition techniques, in terms of the data and algorithms used and the reported recognition performance. (Yong., et al. 2010).

Even though 3D face recognition is still a new emerging area, there is a need to compare the strength of each technique in a controlled setting where they would be subjected to the same evaluation protocol on a large dataset; this need for objective evaluation prompted the design of the evaluation studies as well as the upcoming. (Moghaddam, & Pentland., 1998) (Bartoli, 2006)

The principles of biometric evaluation laid down in the evaluation strategy, so far, these evaluation studies are limited to 2D face recognition techniques but will hopefully include 3D face recognition techniques in the near future

## **II. CONCLUSION**

Face images are the inputs of the face recognition system, there are a deferent algorithms, and

methods used for faces recognizing, even though, the fields still have a challenges and limitations; it is still now need more accurate techniques, especially for the 3D, also the capturing technology requires of cooperation subject still face a problems and, challenges, furthermore the extension of current face recognition has a bigger problem of face detection, the network need parameters leading to reduced poor generalization capabilities, and face detection tasks are needed for given highs images detection. Finally researchers find that the change of recognition rate is not appreciable when the number of hidden neurons is more than 40, the researcher recommends that there's a needs for evaluation studies, and researches especially on face recognition field and 3D, in order reduces problems and challenges in the felids, will hopefully for new advanced techniques and methods in the near future.

#### **ACKNOWLEDGEMENTS**

The author asmahan altaher is grateful to the Applied science Private University , Amman , Jordan , for the full financial support granted to this research project (DRGS-2014-2015-37)

#### **References**

- [1] A. Patra and S. Das. (2008) Enhancing decision combination of face and fingerprint by exploitation of individual classifier space: An approach to multi-modal biometry. *Pattern Recognition*, 41(7):2298-2308.
- [2] D. Zhang and Y. Wang. (2009) Gender Recognition Based on Fusion of Face and Multi-view Gait.(2009) In LNCS, volume 5558, pages 1010-1018. Springer, 2009.
- [3]Hu L and Wei Z,(2009) "An Algorithm of Glass-Image Recognition Based on Wavelet Packet Decomposition,"*International Conference on Computational Intelligence and Natural Computing*, vol.1, 2009, pp.206-209.
- [4] Yun Fu,(2010) Age Synthesis and Estimation via Faces: IEEE CONFERENCE PUBLICATIONS A Survey, 2010 , Page(s): 2590 - 2597  
Cited by: Papers (3).
- [5] Zhang. D and Y. Wang.(2009)" Gender Recognition Based on Fusion of Face and Multi-view Gait". In LNCS, volume 5558, pages 1010-1018. Springer,
- [6] Whaite., p.and Ferrie.,P (1991) "From uncertainty to visual exploration", *IEEE T-PAMI*, vol. 13, no. 10, pp.1038 -1049 1991.
- [7] Wilkes., D. and Tsotsos., J. K. (1992) "Active object recognition", *Proc. CVPR*, pp.136 -141 1992
- [8] Jianke Zhu,(2009) A Fast 2D Shape Recovery Approach by Fusing Features and Appearance Pattern

Analysis and Machine Intelligence, IEEE Transactions on, Volume:31, Issue: 7

[9] Pilet, V. Lepetit and P. Fua,(2008) "Fast Non-Rigid Surface Detection, Registration and Realistic Augmentation," *Int'l J. Computer Vision*, vol. 76, no. 2, pp. 109-122, 2008.

[10] Zhao W., R. Chellappa, P. J. Phillips and A. Rosenfeld,(2006) "Face recognition: A literature survey", *ACM Comput. Surv.*, vol. 35, no. 4, pp.399-459 2006.

[11] Bartoli, A (2006)"Groupwise Geometric and Photometric Direct Image Registration," *Proc. 17th British Machine Vision Conf.*, Sept. 2006.

[12] Moghaddam.B, Wahid W. & Pentland A., (1998) " International conference on face & Gesture Recognition,Nara, Japan.

[13]<http://www.troyhunt.com/>,Does (2013) Tesco's facial recognition ad targeting cross "the creepy line"?, November 6, 2013.

[14] Zheng, Haomian (2009) "Efficient human action recognition by luminance field trajectory and geometry information, Multimedia and Expo", 2009. ICME 2009. IEEE International Conference on, Pages, 842 – 845

[15] Qing Chen, Xiaoli Yang, Jiying Zhao,(2005) "Robust image watermarking with Zernike moments," IEEE 1-4 May 2005 Page(s):1340 – 1343.

[16] Wright, J.; Yang, A.Y.; Ganesh, A.; Sastry, S.S.; Yi Ma,(2009) "Robust Face Recognition via Sparse Representation," *Pattern Analysis and Machine Intelligence*, IEEE Transactions on, vol.31, no.2, pp.210-227, Feb. 2009

[17] Shlizerman, Kemelmacher- (2011)"3D Face Reconstruction from a Single Image Using a Single Reference Face Shape", *Biometrics Compendium*, IEEE, Volume:33, Issue: 2). 2011, Page(s): 394 – 405.

[18]Yong sheng Gao ; Sanqiang Zhao ; Jianzhuang Liu.,(2010)Local Derivative Pattern Versus Local Binary Pattern: Face Recognition With High-Order Local Pattern Descriptor, *Image Processing,Biometrics Compendium*, IEEE Transactions on (Volume:19, Issue: 2).

[19] Gao, B. Cao, S. Shan, X. Chen, D. Zhou, X. Zhang and D. Zhao (2008) "The CAS-PEAL large-scale Chinese face database and baseline evaluations", *IEEE Trans. Syst., Man., Cybern. A, Syst. Humans*, vol. 38, no. 1, pp.149-161 2008.

[20]Xiong Li ; Xu Zhao ; Yun Fu ; Yuncai Liu, ( 2010) Bimodal gender recognition from face and fingerprint. : IEEE CONFERENCE PUBLICATIONS A Survey.

[21]X. Xu and T. S. Huang. (2007)SODA-Boosting and its application to gender recognition. In *IEEE International Workshop on Analysis and Modeling of Faces and Gestures*, volume 4778, pages 193-204, 2007.

[22]Yin Zhang,(2010) " Cost-Sensitive Face Recognition", *Biometrics Compendium*, 32, Issue: 10, *Biometrics Compendium*, IEEE, 2010, Page(s): 1758 – 1769

[23] Wiskott,L, Fellous, J. Kruger,N and C. von der Malsburg.(1995)" Face recognition and gender determination. In *IEEE International Workshop on Automatic Face and Gesture Recognition*, 1995.

[24] Dyar. C.R (1994) "Global surface reconstruction by purposive control of observer motion", *Computer Vision and Pattern Recognition*, 1994. *Proceedings CVPR '94.*, 1994 IEEE Computer Society Conference .

### Authors Biography



**Dr. Asmahan M. Altaher**, Associate professor Faculty of Business Administration. Management Information system Department –Applied Science Private University, Amman- Jordan Sep – 2009 – till now.